



**AN ISO 9001 : 2015 CERTIFIED COMPANY**



## **Paras Luminaries**

No. 15/1, L. M. Building  
Ashwathkotte Main Road,  
Kasturiba Nagar, Mysuru Road,  
Bengaluru - 560026  
Tel : 080-26750318  
Mob. : 9343772777, 9845142854  
Email : [paraslighting154@gmail.com](mailto:paraslighting154@gmail.com)  
Website : [www.brentled.com](http://www.brentled.com)



**WE PROVIDE SMART LIGHTINGS**



**Brent**  
LIGHT FOR GENERATIONS



## COMPANY PROFILE

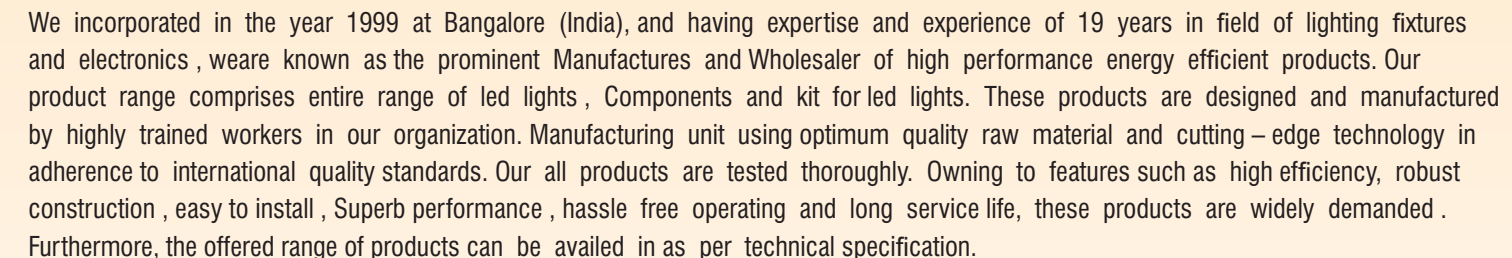


We have highly professional team who designs and manufacture these products using quality tested raw material, along with advanced technology techniques. Our organization has employed highly skilled and dexterous professionals who have huge experience in this domain. In the order to improve the quality and durability of our product, we have hired a team of research associates , which conducts extensive market research and products research to keep itself abreast of latest technological advancements in the domain . Their highly motivated and dedicated efforts have put us in the league of prominent company.

In order to store our products in a safe and secure manner, we have set up a well – equipped large warehousing facility with modern amenities that is administered by our warehousing personnel. This warehouse has been further segregated into various sections to store the products as per their category. We deliver our products in high quality packaging material in order to ensure safe transit at the client's end. Being a quality – centric organization, our main objective is to satisfy our client by offering them high performance products in the committed time frame. We are a customer – friendly organization and always focus to attain the utmost client's satisfaction. With the help of our reliable vendors and professional team, we are able to deliver the offered range to our client in different technical specifications and designs as per their requirements.




<b>MODEL</b>	:	<b>SPL 18</b>
RATED INPUT POWER	:	18 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	334 X 110 X 51
PIPE DIA	:	45 MM
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	:	<b>SPL 24</b>
RATED INPUT POWER	:	24 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	334 X 110 X 51
PIPE DIA	:	45 MM
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: LSPL 24</b>
RATED INPUT POWER	: 24 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 292 X 106 X 56
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: ESPL 30</b>
RATED INPUT POWER	: 30 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 334 X 110 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: SPL 30</b>
RATED INPUT POWER	: 30 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 335 X 1256 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 36</b>
RATED INPUT POWER	: 36 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 335 X 125 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: LSPL 36</b>
RATED INPUT POWER	: 36 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 318 X 112 X 61
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 40</b>
RATED INPUT POWER	: 40 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 335 X 125X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: 109 LSPL 40</b>
RATED INPUT POWER	: 40 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 335 X 125 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: ESPL 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: ESPL 50 F</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: 109 ELSPL 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST






<b>MODEL</b>	<b>: 109 ELSPL 50 F</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLESPL 50 F</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: LSPL 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 410 X 160 X 55
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: DOSPL 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: COB
LENS	: Polycarbonate
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 45 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: SPL 60 G</b>
RATED INPUT POWER	: 60 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 60 F</b>
RATED INPUT POWER	: 60 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: 109 LSPL 60 G</b>
RATED INPUT POWER	: 60 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: 109 LSPL 60 F</b>
RATED INPUT POWER	: 60 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST






<b>MODEL</b>	<b>: HLSPL 60 F</b>
RATED INPUT POWER	: 60 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 72 G</b>
RATED INPUT POWER	: 72 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 72 F</b>
RATED INPUT POWER	: 72 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: 109 LSPL 72 G</b>
RATED INPUT POWER	: 72 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: 109 LSPL 72 F</b>
RATED INPUT POWER	: 72 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 72 F</b>
RATED INPUT POWER	: 72 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: ESPL 90</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 361 X 200 X 67
PIPE DIA	: 55 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: EHLSPL 90 F</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: SPL 90 G</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 67
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: SPL 90 F</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: 109 LSPL 90 G</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 435 X 200 X 67
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: 109 LSPL 90 F</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 90 F</b>
RATED INPUT POWER	: 90 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 100 G</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 67
PIPE DIA	: 60MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: SPL 100 F</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 100 F</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST








<b>MODEL</b>	<b>: SPL 120 G</b>
RATED INPUT POWER	: 120 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 67
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 120 F</b>
RATED INPUT POWER	: 120 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 120 F</b>
RATED INPUT POWER	: 120 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 433 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: ESPL 150 G</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: ESPL 150 F</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 435 X 200 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: EHL SPL 150</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 375 X 147 X 51
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: SPL 150 F</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 150 F</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 180 F</b>
RATED INPUT POWER	: 180 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 180 F</b>
RATED INPUT POWER	: 180 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: 109 LSPL 180 F</b>
RATED INPUT POWER	: 180 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
LENS	: Polycarbonate
OVER ALL DIMENSION	: 520 X 260 X 95
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 200 F</b>
RATED INPUT POWER	: 200 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: HL SPL 200 F</b>
RATED INPUT POWER	: 200 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
LENS	: Polycarbonate
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: SPL 250 F</b>
RATED INPUT POWER	: 250 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 520 X 260 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST






<b>MODEL</b>	<b>: HLSPL 250 F</b>
RATED INPUT POWER	: 250 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 520 X 460 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLSPL 300 F</b>
RATED INPUT POWER	: 300 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 520 X 460 X 90
PIPE DIA	: 60 MM
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>:</b>	<b>HLSISPL-20</b>
RATED INPUT POWER	:	20 WATTS
BATTERY	:	LFP 12.8 V / 18 AH IN BUILD
SOLAR PANNEL	:	60 WP
BACK UP	:	5 AMPS
LED	:	15 HR AT SINGLE CHARGE
OVER ALL DIMENSON	:	207 X 421 X 100
PIPE DIA	:	50 MM



<b>MODEL</b>	<b>:</b>	<b>HLAISPL- 20</b>
RATED INPUT POWER	:	20 WATTS
BATTERY	:	LFP 12.8 V / 18 AH IN BUILD
SOLAR PANNEL	:	60 WP
BACK UP	:	5 AMPS
LED	:	15 HR AT SINGLE CHARGE
OVER ALL DIMENSON	:	555 X 675 X 60
PIPE DIA	:	50 MM




<b>MODEL</b>	<b>:</b>	<b>HLSISPL-30</b>
RATED INPUT POWER	:	30 WATTS
BATTERY	:	LFP 12.8 V / 24 AH IN BUILD
SOLAR PANNEL	:	80 WP
BACK UP	:	5 AMPS
LED	:	15 HR AT SINGLE CHARGE
OVER ALL DIMENSON	:	207 X 421 X 100
PIPE DIA	:	50 MM




<b>MODEL</b>	<b>:</b>	<b>HLAISPL- 30</b>
RATED INPUT POWER	:	30 WATTS
BATTERY	:	LFP 12.8 V / 24 AH IN BUILD
SOLAR PANNEL	:	80 WP
BACK UP	:	5 AMPS
LED	:	15 HR AT SINGLE CHARGE
OVER ALL DIMENSON	:	555 X 675 X 60
PIPE DIA	:	50 MM



<b>MODEL</b>	<b>: VFPL - 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 200 X 215 X 50
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: LFPL - 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 175 X 220 X 40
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:





<b>MODEL</b>	<b>: BFPL - 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 185 X 245 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLBFP - 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 185 X 245 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:







<b>MODEL</b>	<b>:</b>	<b>VFPL - 100</b>
RATED INPUT POWER	:	100 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	235 X 235 X 55
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>LFPL - 100</b>
RATED INPUT POWER	:	100 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	225 X 285 X 40
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
	:	





<b>MODEL</b>	<b>: BFPL - 100</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 235 X 290 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: HLBFP - 100</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 235 X 290 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:






<b>MODEL</b>	<b>: VFPL - 150</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 290 X 275 X 55
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: LFPL - 150</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 260 X 315 X 45
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:





<b>MODEL</b>	<b>:</b>	<b>BFPL - 150</b>
RATED INPUT POWER	:	150 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	245 X 335 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>ODEL</b>	<b>:</b>	<b>HLBFPL - 150</b>
RATED INPUT POWER	:	150 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	245 X 335 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
	:	





<b>MODEL</b>	<b>: VFPL - 200</b>
RATED INPUT POWER	: 200 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 335 X 290 X 65
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: LFPL - 200</b>
RATED INPUT POWER	: 200 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 300 X 375 X 45
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:




<b>MODEL</b>	<b>:</b>	<b>BFPL - 200</b>
RATED INPUT POWER	:	200 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	245 X 335 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>HLBFP - 200</b>
RATED INPUT POWER	:	200 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	245 X 335 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
	:	





<b>MODEL</b>	<b>:</b>	<b>BBFPL - 200</b>
RATED INPUT POWER	:	200 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	300 X 385 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>HLBBFPL - 200</b>
RATED INPUT POWER	:	200 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	300 X 385 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
	:	



<b>MODEL</b>	<b>: VFPL - 250</b>
RATED INPUT POWER	: 250 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 415 X 375 X 80
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: BFPL - 250</b>
RATED INPUT POWER	: 250 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 300 X 385 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:



<b>MODEL</b>	<b>:</b>	<b>HLBFPL - 250</b>
RATED INPUT POWER	:	250 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	300 X 385 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>VFPL - 300</b>
RATED INPUT POWER	:	300 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	415 X 375 X 80
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
	:	



<b>MODEL</b>	<b>: HLVFPL - 300</b>
RATED INPUT POWER	: 300 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 415 X 375 X 80
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: BFPL - 300</b>
RATED INPUT POWER	: 300 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 300 X 385 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:



<b>MODEL</b>	<b>:</b>	<b>BBFPL - 300</b>
RATED INPUT POWER	:	300 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	350 X 485 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>ODEL</b>	<b>:</b>	<b>HLBFP - 300</b>
RATED INPUT POWER	:	300 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	300 X 385 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
	:	





<b>MODEL</b>	<b>: VFPL - 350</b>
RATED INPUT POWER	: 350 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 415 X 375 X 80
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLVFPL - 350</b>
RATED INPUT POWER	: 350 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 415 X 375 X 80
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST







<b>MODEL</b>	<b>: BBFPL - 350</b>
RATED INPUT POWER	: 350 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 350 X 485 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: HLBFP - 350</b>
RATED INPUT POWER	: 350 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 350 X 485 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: BFPL - 400</b>
RATED INPUT POWER	: 400 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 350 X 485 X 130
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLVFPL - 400</b>
RATED INPUT POWER	: 400 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 415 X 375 X 80
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>:</b>	<b>HLBFPL - 400</b>
RATED INPUT POWER	:	400 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	350 X 485 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>BFPL - 500</b>
RATED INPUT POWER	:	500 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	350 X 485 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>HLBFPL - 500</b>
RATED INPUT POWER	:	500 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	350 X 485 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>HLBFPL - 600</b>
RATED INPUT POWER	:	600 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	350 X 485 X 130
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LA
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST





<b>MODEL</b>	<b>:</b>	<b>HLBFPL - 800</b>
RATED INPUT POWER	:	800 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	600 X 400 X 140
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>HLBFPL - 1000</b>
RATED INPUT POWER	:	1000 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	600 X 400 X 140
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HBPL - 50</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 185 MM ROUND
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HBPL - 50D</b>
RATED INPUT POWER	: 50 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 185 MM ROUND
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST
	:





<b>MODEL</b>	<b>:</b>	<b>HLHBPL - 50</b>
RATED INPUT POWER	:	50 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	185 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST




<b>MODEL</b>	<b>:</b>	<b>ALD - 50</b>
OVER ALL DIMENSION	:	250 MM ROUND





<b>MODEL</b>	<b>:</b>	<b>HBPL - 100</b>
RATED INPUT POWER	:	100 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	230 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>LHLPL - 100</b>
RATED INPUT POWER	:	100 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	245 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST





<b>MODEL</b>	<b>:</b>	<b>HLHBPL - 100</b>
RATED INPUT POWER	:	100 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	230 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>ALD - 100</b>
OVER ALL DIMENSION	:	330 MM ROUND



<b>MODEL</b>	<b>:</b>	<b>HBPL - 150</b>
RATED INPUT POWER	:	150 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	330 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>HBPLD - 150</b>
RATED INPUT POWER	:	150 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	330 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST
<b>MRP</b>	:	





<b>MODEL</b>	<b>:</b>	<b>HLHBPL - 150</b>
RATED INPUT POWER	:	150 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	330 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>ALD - 150</b>
OVER ALL DIMENSION	:	410 MM ROUND




<b>MODEL</b>	<b>: HBPL - 200</b>
RATED INPUT POWER	: 200 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 330 MM ROUND
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLHBPL - 200</b>
RATED INPUT POWER	: 200 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 330 MM ROUND
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST






<b>MODEL</b>	<b>:</b>	<b>LHLPL - 200</b>
RATED INPUT POWER	:	200 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	OSRAM / SEOUL
OVER ALL DIMENSION	:	342 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST



<b>MODEL</b>	<b>:</b>	<b>ALD - 200</b>
OVER ALL DIMENSION	:	410 MM ROUND




<b>MODEL</b>	<b>:</b>	<b>HLHBPL - 250</b>
RATED INPUT POWER	:	250 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	330 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST




<b>MODEL</b>	<b>:</b>	<b>HLHBPL - 300</b>
RATED INPUT POWER	:	300 WATTS
INPUT VOLTAGE	:	AC 170 - 270V
CCT	:	3000 - 6500 K
LED	:	HIGH POWER LED
OVER ALL DIMENSION	:	330 MM ROUND
DAY & NIGHT SENSOR	:	AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	:	AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	:	AVAILABLE ON REQUEST








<b>MODEL</b>	<b>: WGPL - 100</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 290 MM ROUND
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST




<b>MODEL</b>	<b>: WGPL - 150</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: HIGH POWER LED
OVER ALL DIMENSION	: 290 MM ROUND
DAY & NIGHT SENSOR	: AVAILABLE AT EXTRA COST
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST





<b>MODEL</b>	<b>: PPL - 100</b>
RATED INPUT POWER	: 100 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 370 X 370 X 90
CUT OUT DIMENSION	: 235 X 265 X 70
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



<b>MODEL</b>	<b>: HLPPL - 150</b>
RATED INPUT POWER	: 150 WATTS
INPUT VOLTAGE	: AC 170 - 270V
CCT	: 3000 - 6500 K
LED	: OSRAM / SEOUL
OVER ALL DIMENSION	: 370 X 370 X 90
CUT OUT DIMENSION	: 235 X 265 X 70
Lm79 LM80 IP66	: AVAILABLE FROM NABL APPROVED LAB
DETAIL OF PRODUCTS	: AVAILABLE ON REQUEST



**MODEL** : **WGFPPL - 50**  
**RATED INPUT POWER** : 50 WATTS  
**INPUT VOLTAGE** : AC 170 - 270V  
**CCT** : 3000 - 6500 K  
**LED** : COB LED



**MODEL** : **BWGFPPL - 50**  
**RATED INPUT POWER** : 50 WATTS  
**INPUT VOLTAGE** : AC 170 - 270V  
**CCT** : 3000 - 6500 K  
**LED** : COB LED



**MODEL** : **BUPL - 10**  
**RATED INPUT POWER** : 10 WATTS  
**INPUT VOLTAGE** : AC 170 - 270V  
**CCT** : 3000 - 6500 K  
**LED** : OSRAM / SEOUL



**MODEL** : **BUPL - 20**  
**RATED INPUT POWER** : 20 WATTS  
**INPUT VOLTAGE** : AC 170 - 270V  
**CCT** : 3000 - 6500 K  
**LED** : OSRAM / SEOUL



**MODEL** : **GLPL - 30**  
**RATED INPUT POWER** : 30 WATTS  
**INPUT VOLTAGE** : AC 170 - 270V  
**CCT** : 3000 - 6500 K  
**LED** : OSRAM / SEOUL



**MODEL** : **GLPL - 50**  
**RATED INPUT POWER** : 50 WATTS  
**INPUT VOLTAGE** : AC 170 - 270V  
**CCT** : 3000 - 6500 K  
**LED** : OSRAM / SEOUL



**MODEL** : **SPDPL - 10**  
 : 10 KV



**DRIVER** : 12 WATTS  
**DRIVER** : 24 WATTS  
**DRIVER** : 30 WATTS  
**DRIVER** : 36 WATTS  
**DRIVER** : 50 WATTS